

## S3-Logger

### Solis Data Loggers

S3-Logger is a data acquisition and protocol conversion device applied to PV equipment in PV power plants, which can support access of meters, weather stations and other equipment.


#### Features:

- Support data connection to local monitoring system
- Support a variety of communication protocols
- One-key address allocation and EPM function
- Inverter remote upgrade
- Support electricity meters, weather stations and other equipment access
- FTP data transfer



S3-Logger

#### Intelligent Monitoring Solution - S3-Logger

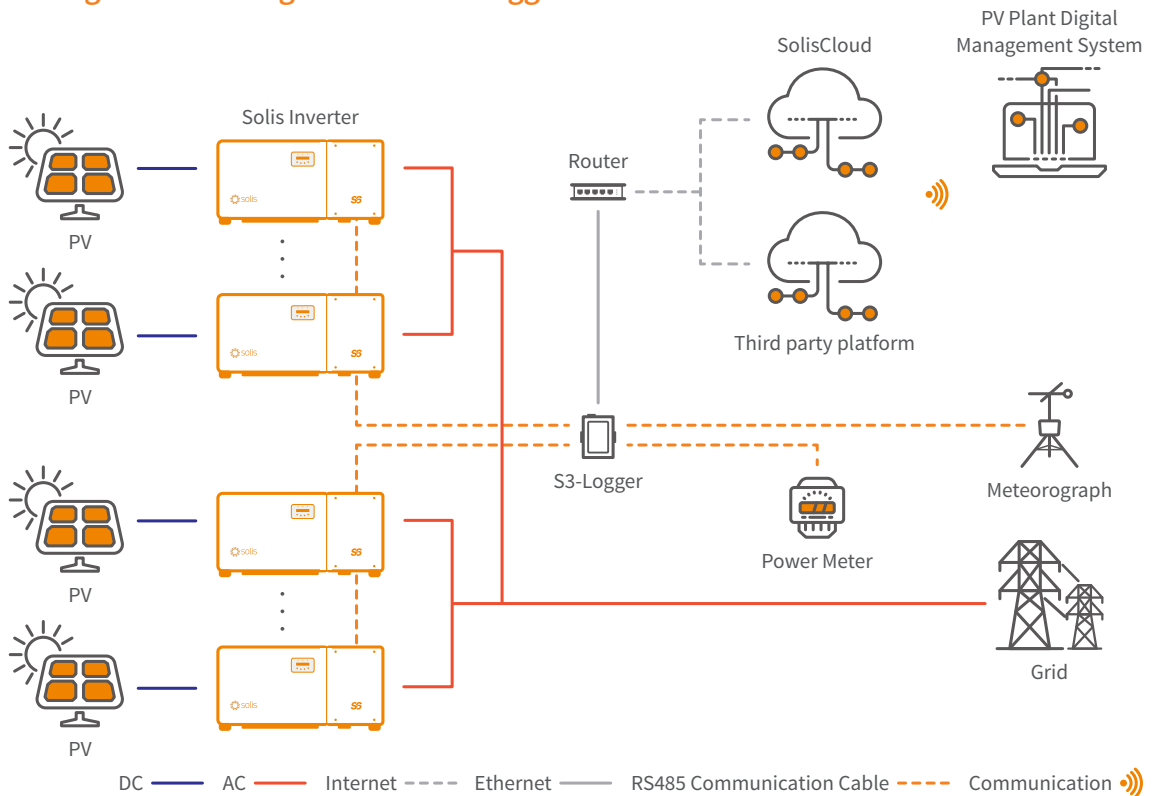

## DATASHEET

Models	S3-Logger	S3-Logger-EPM
<b>Communication</b>		
Supported device type	Solis inverter	
Max. manageable device <sup>①</sup>	60, Each RS485 PORT≤15	
Status indicator	LED × 2, Power, Run	
RS485	COM × 4, 1200 ~ 115200 bps, communication distance ≤ 1000 m	
Ethernet communication	LAN × 1, 10 / 100 Mbps adaptive, communication distance ≤ 100 m	
Zero power output	/	Yes
<b>Communication Protocol</b>		
RS485	Modbus-RTU, IEC60870-5-103, DLT645	
Ethernet	Modbus-TCP, IEC60870-5-104	
<b>Electrical</b>		
AC power supply	100 ~ 240 V, 50 Hz / 60 Hz	
DC power supply	9 ~ 36 V	
Power consumption	5 W	
<b>Environment</b>		
Operating temperature	-40 ~ +80°C	
Storage temperature	-40 ~ +80°C	
Relative humidity	≤ 85%, Non-condensing	
Max. operating altitude	4000 m	
<b>Mechanical</b>		
Dimensions (L × W × H)	89 × 121 × 27 mm	
Protection degree	IP20	
Installation method	Rail Mounting, Desktop installation	
<b>Others</b>		
Certification	CE, RoHS	

① Inverters must first be hand-in-hand connected by RS485.

## Matching Instructions

Type	Manufacturer	Model	Connection method	Special note	
Meteorograph	Jinzhou Sunshine	PC-4	PC-4GF	RS485 connects to the P3 port on S3-Logger	1. In addition to the above device models, the newly matched models will continue to be updated; 2. If you need to match new meteorological or meter devices, please provide manuals, specifications, communication protocols and other documents; 3. The match of the new equipment, the development time is about 2 weeks, and the final delivery of the new firmware will be upgraded on site.
	Rainwise	PVmet-75	PVmet-200		
	SevenSolar	3S-IS V7			
	Ingenieurburo	Si-RS485TC-2T			
	FIMER	VSN800			
	Kopya SOLIS-VISIONSEN MAP	VSS-5	VSS-6		
		VSS-9	VSS-10		
	BARANIDESIGN	Easy MODBUS Starter Kit			
Meter	Hunan Rika Electronic	RK220-01		RS485 connects to the P4 port on S3-Logger	
	Acrel	DTSD1352	ADL3000-E-B		
	Janitza	UMG-96RM	UMG-512		
		UMG604			
	Mikro	RX380			
	MEATROL	EM231			
	Schneider	PM5100	iEM3000		
	iEM3255	EM6400			
	Iskra	MC774			