

S3-WIFI-ST

Solis Data Loggers

Use RS485 communication method to connect the inverter, and data connection through wireless WiFi network, which can realize remote control and monitoring. The network transmits intuitive data, which is convenient for customers to monitor at any time and place.


Features:

- Fault alarm, real-time monitoring
- Plug and play, convenient and fast
- Status indicator, easy to display
- RESET button, one key to send data, convenient debugging
- working status



S3-WIFI-ST

Intelligent Monitoring Solution - S3-WIFI-ST

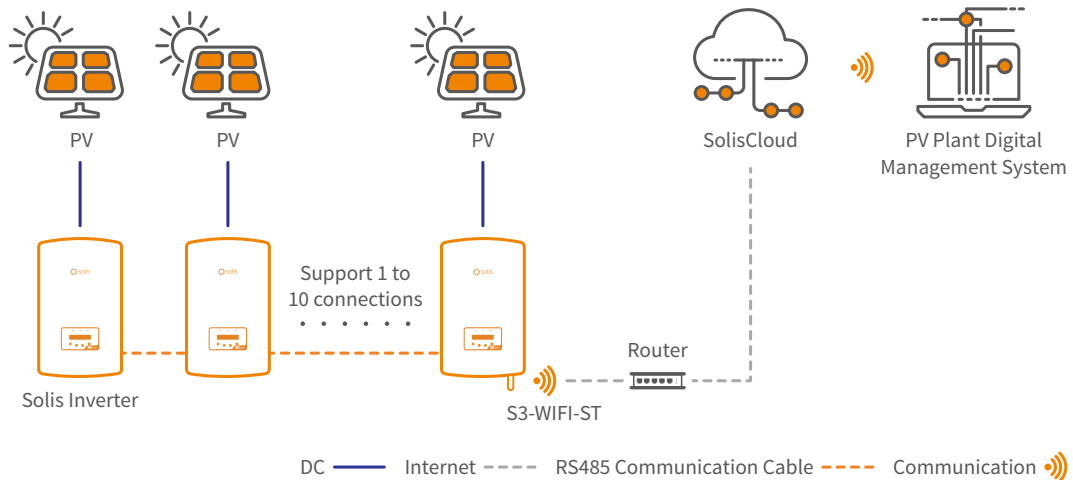

DATASHEET

Models	S3-WIFI-ST
Communication	
Supported device type	Solis inverter
Number of connected inverters ^①	≤ 10
Data collection intervals	5 minutes
Status indicator	3 LED Indicator Lights
Communication interface	External 4-Pin Port
Wireless communication	802.11b/g/n, 2.412-2.484GHz ^②
Max. output power	802.11b: 18dBm; 802.11g: 16.5dBm; 802.11n: 15.5dBm
Configuration method	APP / WEB
Electrical	
Operating voltage	DC 5 V (+ / -5%)
Typical power consumption	2 W
Environment	
Operating temperature	-30 ~ +65°C
Operating humidity	5% - 95%, Relative humidity, non-condensing
Storage temperature	-40 ~ +70°C
Storage humidity	< 40%
Max. operating altitude	4000 m
Ingress protection	IP65
Mechanical	
Dimensions (L × W × H)	133 × 44 × 44 mm
Installation method	Externally Insert + Twist Lock
Weight	85 g
Others	
Certification	CE, FCC

① Inverters must first be hand-in-hand connected by RS485. ② 5 GHz Wi-Fi networks are not supported.